




SELF-DRILLING STANDING SEAM ROOF SCREW

APPLICATION




SS SUS410

Sheet-to-sheet

Steel ≤ 1,5 mm

SPECIFICATION



- 1 Head style Torx 25
- 2 Thread for substructure steel ≤ 1,5 mm
- 3 Sharp point

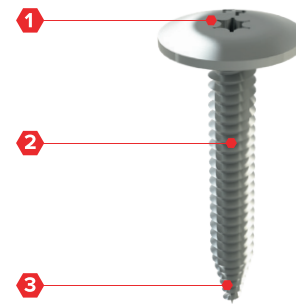


OPTIONS

- 1 Powder coated in any desired colour

SECTION

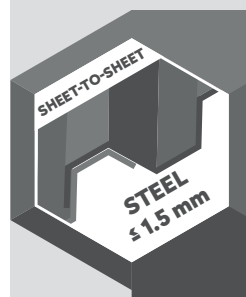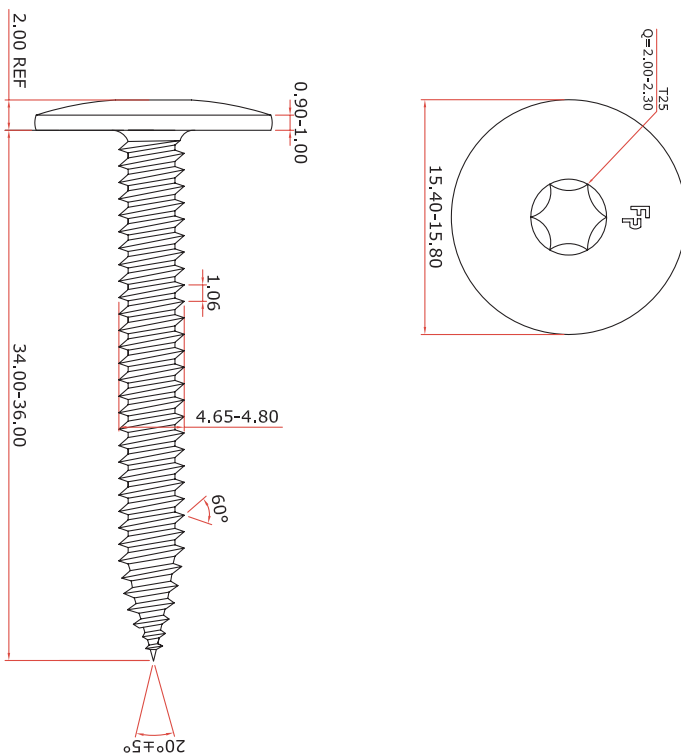

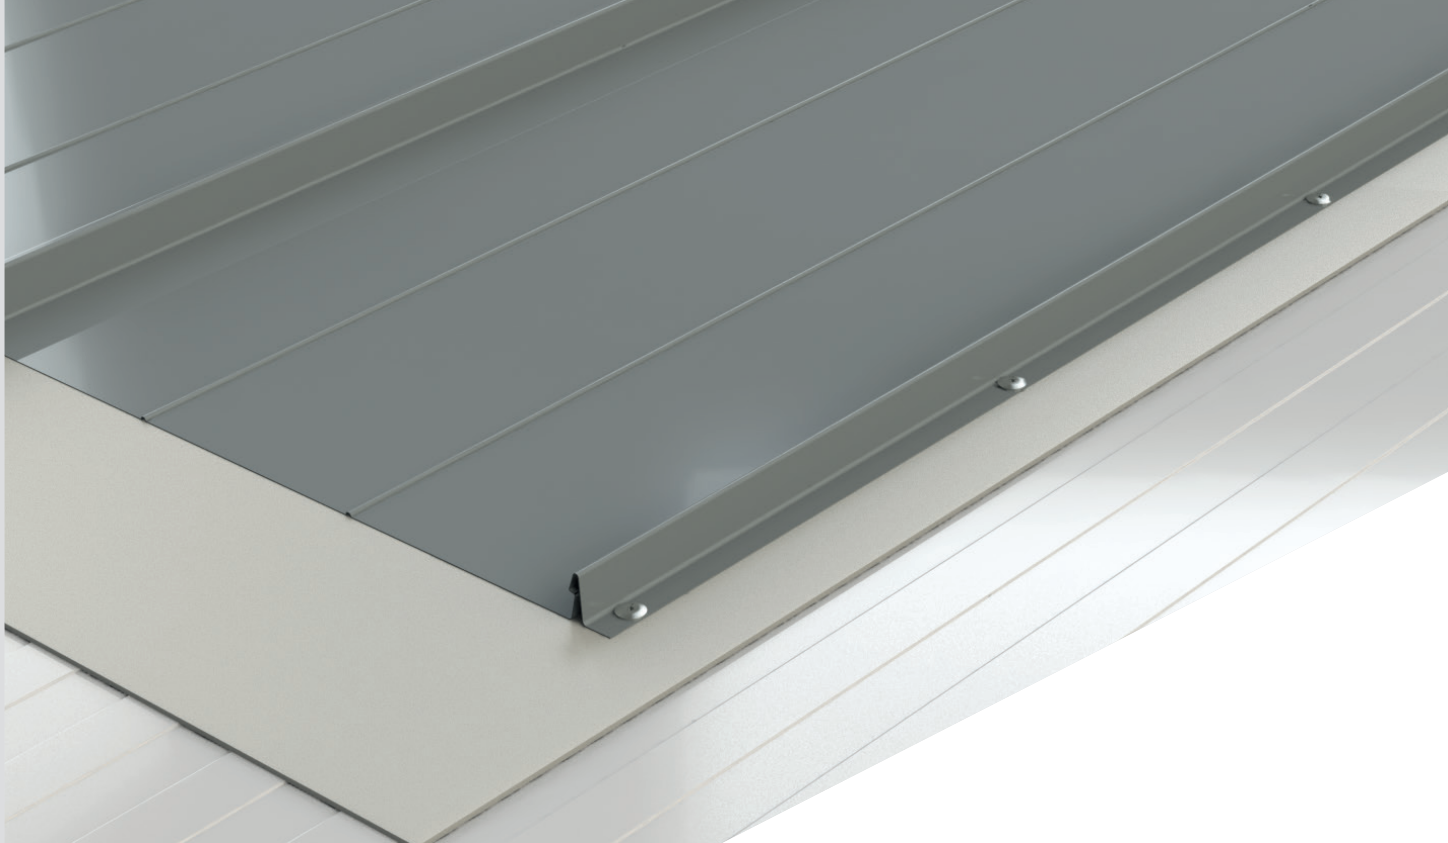

ORDER INFORMATION

Product	Size	Packaging	Article code
Standing seam roof screw 4,8 x L, Sharp point	4,8 x 35 mm	250 pcs/box	20030048035



More information on materials, application, specific properties and certification can be found in chapter 10.

CERTIFICATES



QUALITY
CONFIRMED

