




CORRUGATED SHEET SELF-DRILLING SCREW DP3

APPLICATION




Bi-metal A2 304

Corrugated Sheet



steel 1,5 to 5 mm

SPECIFICATION



- 1 Head style 5/16" (8 mm)
- 2 EPDM with SS washer 25 mm
- 3 Wings to enlarge drilling hole in corrugated sheet
- 4 Thread for Support steel 1,5 to 5 mm
- 5 Drilling point 3 (hardened steel)

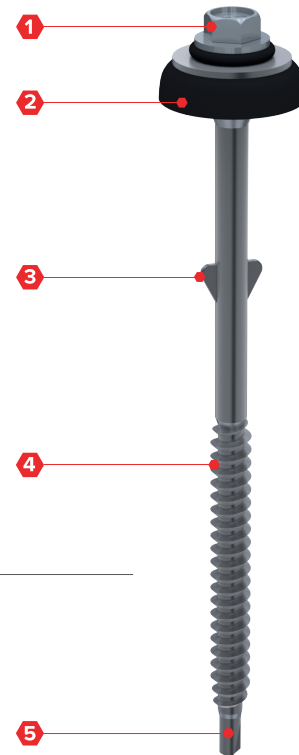

SECTION

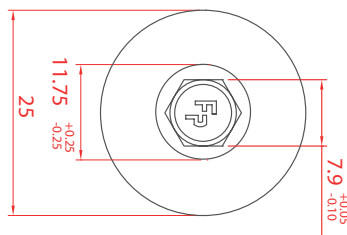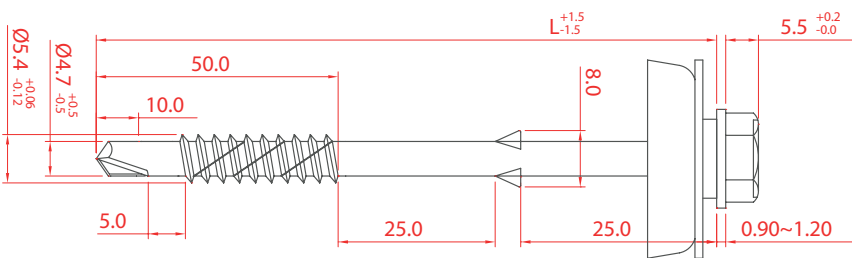

CORRUGATED SHEETS - STEEL 1,5 TO 5 MM - BI-METAL A2 304

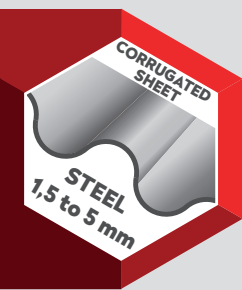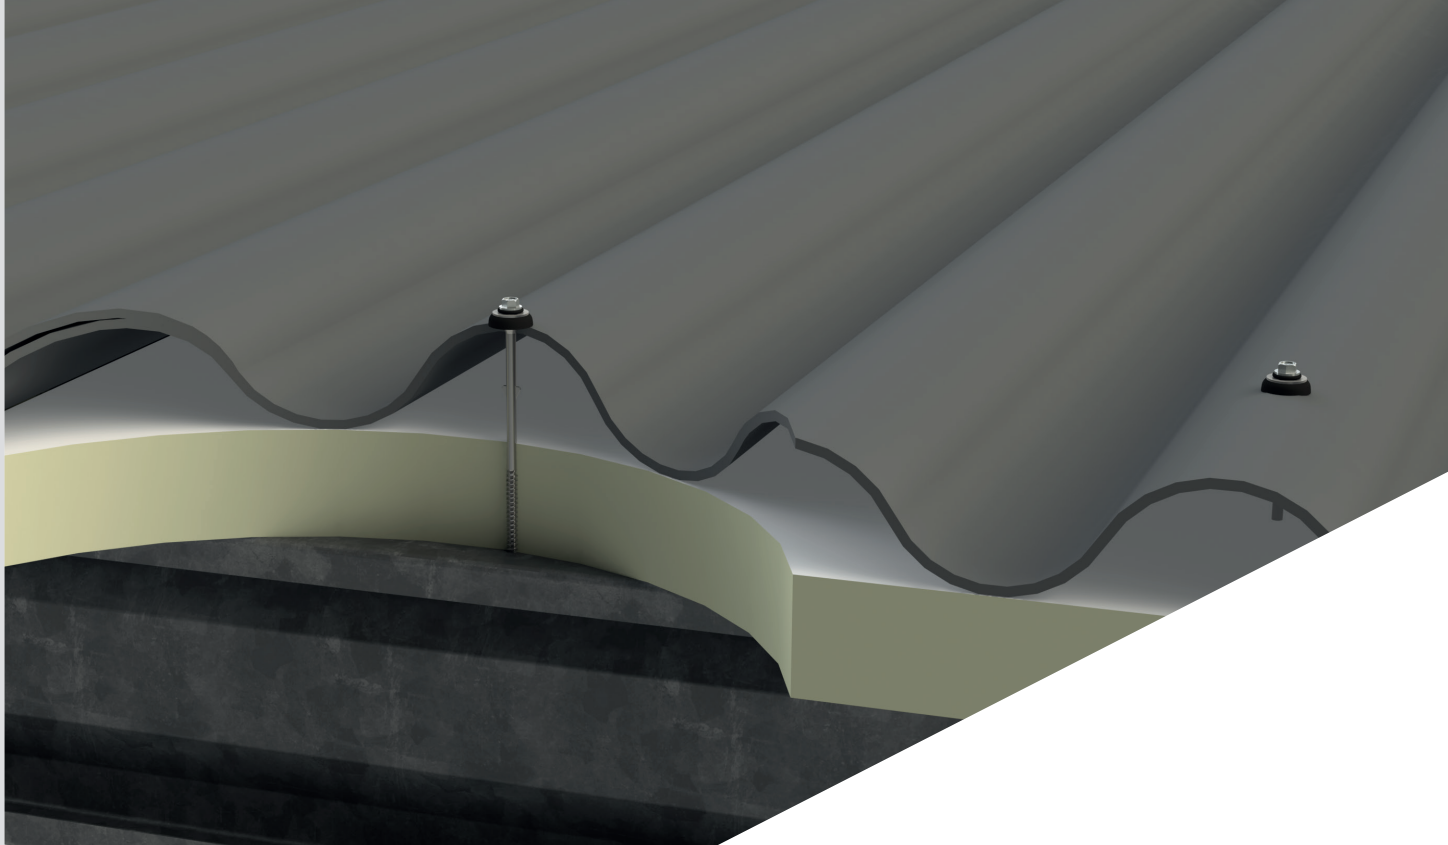

CORRUGATED SHEETS - STEEL 1,5 TO 5 MM - BI-METAL A2 304

APPLICATION

Using the table below you can easily determine the sufficient screw length.

Size	Insulation thickness (mm)													Article code	
	20	40	60	80	100	120	140	160	180	200	220	240	260		280
5,5 x 115 mm	Without insulation													1501035511525	
5,5 x 165 mm			30 - 50 mm												1501035516525

ORDER INFORMATION

Product	Description	Size	EPDM	Packaging	Article code
Corrugated Sheet Screw	Bi-metal A2 304, DP3	5,5 x 115 mm	25 mm	100 pcs/box	1501035511525
Corrugated Sheet Screw	Bi-metal A2 304, DP3	5,5 x 165 mm	25 mm	100 pcs/box	1501035516525



More information on materials, application, specific properties and certification can be found in chapter 10.