




STANDARD BLIND RIVET ALUMINIUM / SS A2

APPLICATION




Aluminium / SS A2

Sheet-to-sheet

Various

SPECIFICATION


- 1 Mandrelkop (SS A2)
- 2 Rivet body (aluminium)
- 3 Nail head (aluminium)
- 4 Mandrel (SS A2)

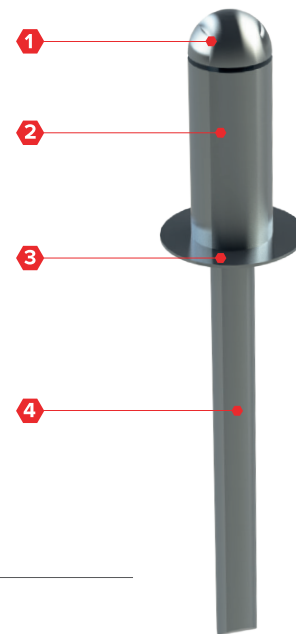


OPTIONS

- 1 Powder coated in any desired colour

SECTION

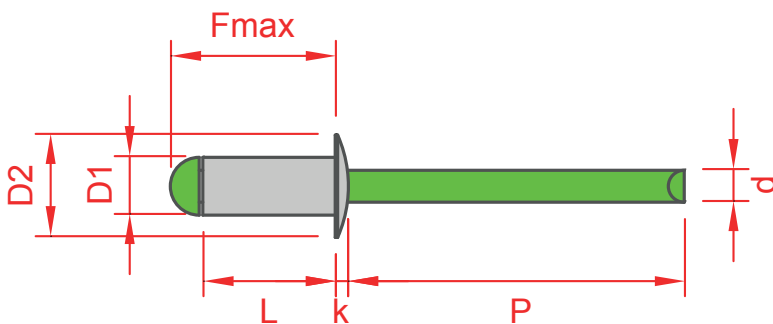

STITCHING SCREWS - ALUMINIUM / SS A2

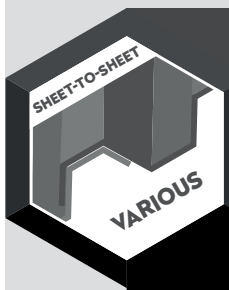




APPLICATION

Using the table below you can easily determine the sufficient blind rivet length.

Size	Thickness (mm)															Article code
	0,5	1,0	2,0	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0	12,0	14,0	16,0		
4,0 x 12 mm																20160040012
4,8 x 12 mm																20160048012
4,8 x 16 mm																20160048016

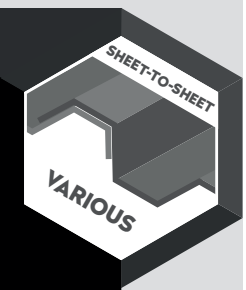



STANDARD BLIND RIVET ALUMINIUM / SS A2

DIMENSIONS

Product	D1	D2	d	P	k	L	Fmax	Pre-drill
Standard blind rivet, 4,0 x 12 mm, AL/A2	4,0	8,0	2,1	> 27 mm	1,0	12,0	16,9	4,1
Standard blind rivet, 4,8 x 12 mm, AL/A2	4,8	9,5	2,7	> 27 mm	1,1	12,0	17,4	4,9
Standard blind rivet, 4,8 x 16 mm, AL/A2	4,8	9,5	2,7	> 27 mm	1,1	16,0	21,4	4,9

MECHANICAL PROPERTIES

Product	Shear force	Tensile strength
Standard blind rivet, 4,0 x 12 mm, AL/A2	1200 N	1600 N
Standard blind rivet, 4,8 x 12 mm, AL/A2	1700 N	2250 N
Standard blind rivet, 4,8 x 16 mm, AL/A2	1700 N	2250 N

ORDER INFORMATION

Product	Size	Packaging	Article code
Standard blind rivet, 4,0 x 12 mm, AL/A2	4,0 x 12 mm	1000 pcs	20160040012
Standard blind rivet, 4,8 x 12 mm, AL/A2	4,8 x 12 mm	500 pcs	20160048012
Standard blind rivet, 4,8 x 16 mm, AL/A2	4,8 x 16 mm	500 pcs	20160048016

Other types and measurements available on request.

CERTIFICATES



QUALITY
CONFIRMED

